

**Big**  
**WHITE**®  
NOVELTIES

| 22



**NEW**

Indicates products that have been added to the catalog for the first time

**NEW VARIANT**

Indicates new versions of existing products

<b>N</b>	<b>NUMINOS®   LIGHTING SYSTEM</b>	04 - 15
	NUMINOS®	08 - 08
	NUMINOS® MOVE	09 - 09
	NUMINOS® GIMBLE	10 - 11
	NUMINOS® XL	12 - 13
	NUMINOS® ZOOM	14 - 15
<b>I</b>	<b>INDOOR</b>	18 - 39
	WORKLIGHT	18 - 21
	ONE LINEAR	22 - 23
	ONE DOUBLE	24 - 24
	ONE 60	25 - 25
	PARA CONE GL	26 - 29
	SIGHT TRACK	30 - 31
	PANEL TRACK	32 - 33
	BATTEN	34 - 35
	MILANDOS	36 - 37
	HORN	38 - 38
	KARPO GOOSE	39 - 39
<b>O</b>	<b>OUTDOOR</b>	42 - 55
	ESKINA FRAME	42 - 43
	GRAFIT	44 - 45
	QUADRULO	46 - 47
	SITRA	48 - 49
	BOOKAT	50 - 51
	FLOODI	52 - 53
	SMALL PLOT	54 - 54
	DASAR® FLAT	55 - 55
	ROCCI	55 - 55
<b>A+</b>	<b>ACCESSORIES</b>	56 - 57
	FENDA	56 - 56
	ENOLA	57 - 57





# NUMINOS® ONE DOWNLIGHT & SPOTLIGHT SYSTEM – A THOUSAND POSSIBILITIES.

THE FREELY CONFIGURABLE LIGHTING SYSTEM  
THAT CASTS A GOOD LIGHT ON EVERY SETTING.

No two projects are the same, but many projects demand a uniform lighting and design concept. NUMINOS® is a perfectly coordinated lighting system that harmonizes function, design and technology – for planners and doers, for every need and for maximum variety with minimum effort.



The perfect lighting  
solution for every  
context



High-performance LED module  
with brilliant color rendering



Wide range of DOWNLIGHTS AND SPOTS  
for a harmonious design concept





# REACH YOUR GOAL SYSTEMATICALLY.

With the NUMINOS® online configurator.

## With our configurator, it's that easy:

The first question to answer is: downlight or spotlight? You can then choose between preconfigured and additionally customizable application scenarios or free configuration.

If you are still unsure about the selection of attributes, don't worry: we offer suitable explanations for each selected configuration.

You can find the NUMINOS® configurator here:

[www.numinos.SLV.com](http://www.numinos.SLV.com)




Just three steps to reach your goal:

- 1 TECHNICAL CONFIGURATION  
↓
- 2 OPTICAL CONFIGURATION  
↓
- 3 VISUAL REPRESENTATION & COMPLETION



# REACH YOUR GOAL HERE AND NOW.

Configure your lighting with the  
 BIG WHITE®.

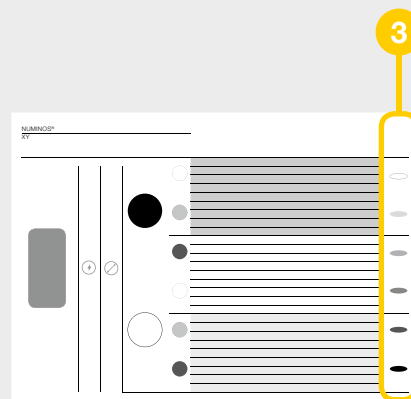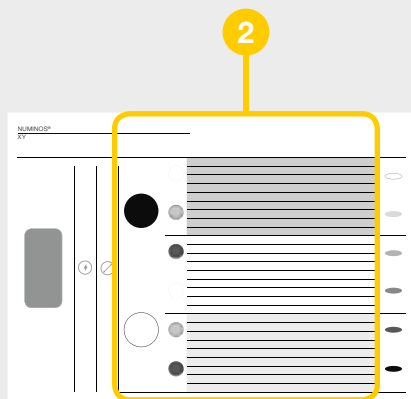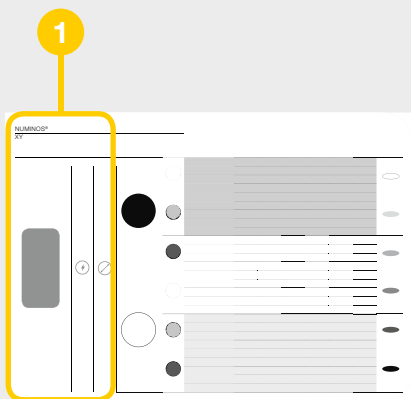

## STEP 1

### SPOTLIGHT OR DOWNLIGHT?

Choose the most suitable light type for your needs. The diameter (downlights) or housing size (spotlights) are coupled with the total wattage.

## STEP 2

### TECHNICAL CONFIGURATION & SELECTION OF DETAILS


Column by column, you can select optical and technical attributes such as housing color or decorative colors, the color temperature, half beam angle and more.

## STEP 3

### PRODUCT

Get a visual impression of your fully configured light and order it right away using the relevant item number.

STILL UNSURE ABOUT SOMETHING?



Scan me to watch a video that shows how easy it is to configure NUMINOS® lights.



# NUMINOS®

The NUMINOS® lighting system now offers even more possibilities for all kinds of project. And even if they are smaller, the lights remain at the cutting edge of lighting technology: with their low power consumption of 7 watts, the rigid downlights in size XS are especially suitable for narrow spaces in which the light cone needs to shine directly downwards.

**N** BW22 | 028

**NEW VARIANT** 

## NUMINOS® XS

DL

Material: aluminum/polycarbonate (PC)

620–750lm | 2700–4000K

200mA

Power consumption: 7W

Available sizes: XS, S, M, L, XL

### Options

<input checked="" type="checkbox"/> black	—	<ul style="list-style-type: none"> <li>black</li> <li>white</li> <li>chrome</li> </ul>
<input type="checkbox"/> white	—	<ul style="list-style-type: none"> <li>black</li> <li>white</li> <li>chrome</li> </ul>



IP 20 /  
IP 44

IK02

L80B50

10

**XS** **S** **M** **L** **XL**



Low voltage plug; driver not included; leaf springs are included with the product and can be exchanged





# NUMINOS® MOVE

The swiveling and rotating version of the NUMINOS® downlights can also set new standards in terms of system performance: the new XS and S sizes are ideal for drawing attention to specifically illuminated objects in small spaces.

**N** BW22 | 038

**NEW VARIANT** 

## NUMINOS® MOVE

DL










Material: aluminum/polycarbonate (PC)

Available sizes: XS, S, M, L, XL

All technical details can be found on **pages 38–47** of the **BIG WHITE® 22** catalog.

### Options

- black
  - black
  - white
  - chrome
  
- white
  - black
  - white
  - chrome

XS

S

M

L

XL



**+** .....  
Low voltage plug; driver not included

**+** .....  
You can find suitable drivers, diffusers and reducer rings for the NUMINOS® downlights on **pages 58–61** of the **BIG WHITE® 22** catalogue.



**+** .....  
**One downlight and spotlight system – a thousand possibilities.**  
You can find all versions of the NUMINOS® DL and NUMINOS® MOVE DL on **pages 28 - 47** of the **BIG WHITE® 22** catalogue.



# NUMINOS® GIMBLE

Anyone who needs more freedom of movement can put together their own suitable project partner with the new NUMINOS® GIMBLE. Thanks to the possibility of 355° rotation and 60° swiveling, this modern downlight offers even greater scope for accentuating objects in a targeted way – with different half beam angles, power classes and colors and, of course, freely selectable decorative rings.



**N** BW22 | 048

**NEW** LED INSIDE

## NUMINOS® GIMBLE

DL

Material: aluminum/polycarbonate (PC)

Available sizes: XS, S, M, L, XL

All technical details can be found on **pages 48–57** of the **BIG WHITE® 22** catalogue.

### Options

- black
  - black
  - white
  - chrome
  
- white
  - black
  - white
  - chrome



Low voltage plug; driver not included



You can find suitable drivers, diffusers and reducer rings for the NUMINOS® downlights on **pages 58 - 61** of the **BIG WHITE® 22** catalogue.



## TIME FOR A CHANGE. TIME FOR AN UPDATE.

When dismantling your outdated recessed ceiling light, do you often find a larger ceiling cut-out than required? **SLV offers the perfect solution to this problem – our new reducer rings.** The reducer ring completely covers the larger ceiling cut-out while at the same time providing perfect support for your new, compact recessed ceiling light.

**Neat, time-saving, straightforward.**

And perfectly coordinated with the NUMINOS® downlight and spotlight system.

**Read more on page 61 of the BIG WHITE® 22 catalogue.**



# NUMINOS® XL

Experience design and function in harmony: the new NUMINOS® XL performance class spotlights simply offer more. Whether as a swiveling spot or rigid ceiling spot, as a pendant light or a flexibly adjustable spotlight for 3-phase track systems, with their total wattage of 36 watts and high luminous flux levels, the extra-large versions are especially impressive for extensive spaces and longer lighting distances.



**N** BW22 | 094

**NEW VARIANT**

## NUMINOS® XL

PD  
Material: aluminum/polycarbonate (PC)

2980–3800lm | 2700–4000K  
220–240V ~50/60Hz | 900mA  
Total wattage: 36W  
Dimmable: C, Dali  
Sizes: S, M, L, XL



**Options**

- black
- white



**N** BW22 | 068

**NEW VARIANT**

## NUMINOS® XL

3 PHASES  
Material: aluminum/polycarbonate (PC)

2980–3800lm | 2700–4000K  
220–240V ~50/60Hz | 900mA  
Total wattage: 36W  
Dimmable: C, Dali  
Sizes: S, M, L, XL



**Options**

- black
- white





**N** BW22 | 086

**NEW VARIANT**



**NUMINOS® XL**

CL  
Material: aluminum/polycarbonate (PC)

2980-3800lm | 2700-4000K  
220-240V ~50/60Hz | 900mA  
Total wattage: 36W  
Dimmable: C, Dali  
Sizes: S, M, L, XL



**Options**

- black
- white



L80B50



**N** BW22 | 078

**NEW VARIANT**



**NUMINOS® XL**

CL  
Material: aluminum/polycarbonate (PC)

2980-3800lm | 2700-4000K  
220-240V ~50/60Hz | 900mA  
Total wattage: 36W  
Dimmable: C, Dali  
Sizes: S, M, L, XL



**Options**

- black
- white



L80B50

350°

90°



All decorative rings for these NUMINOS® models are also available in white



**One downlight and spotlight system – a thousand possibilities.**  
You can find all versions of our NUMINOS® system on pages 62 - 95 of the **BIG WHITE® 22** catalogue.

## NUMINOS® ZOOM

Whether your projects require a narrower or wider light cone, the NUMINOS® ZOOM spotlight gives you the choice. Its half beam angle can be adjusted from 15° to 60°, thus allowing you to choose between targeted accent lighting and uniform illumination of large spaces as desired.



**N** BW22 | 070

**NEW** LED  
INSIDE

### NUMINOS® ZOOM M

3-PHASE

Material: aluminum/polycarbonate (PC)

680–1900lm | 2700–4000K

220–240V ~50/60Hz | 500mA

Total wattage: 20W

Dimmable: C, Dali



#### Options

■ black

□ white



**One downlight and spotlight system – a thousand possibilities.**

You can find all versions of our NUMINOS® system on pages 70 - 71 of the **BIG WHITE® 22** catalogue.







# INDOOR





# WORKLIGHT

The WORKLIGHT lights generate an energizing light that is uniquely glare-free. With a service life of up to 50,000 hours, the integrated LEDs offer long-lasting and energy-efficient power, which – in the new Up/Down versions – can be used to illuminate both work surfaces and their surroundings.

BW22 | 101

BW22 | 100

**NEW**

**NEW**

## WORKLIGHT

FL  
Material: aluminum

Up/Down: 3800lm | 4000K | CRI80  
200–240V ~50/60Hz | 2000mA  
Total wattage: 79W  
Product dimensions:  
L: 69.2 cm, W: 31 cm, H: 195 cm

## WORKLIGHT

TL  
Material: aluminum


Up/Down: 3800lm | 4000K | CRI80  
200–240V ~50/60Hz | 2000mA  
Total wattage: 79W  
Product dimensions:  
L: 69.2 cm, W: 31 cm, H: 120 cm

Options	Prod. no.
<input checked="" type="checkbox"/> black	1005390
<input type="checkbox"/> white	1005391


Options	Prod. no.
<input checked="" type="checkbox"/> black	1005392
<input type="checkbox"/> white	1005394

.....  
Europlug

.....  
Europlug; clamping range: 6 - 40 mm





 BW22 | 146

**NEW**  

## WORKLIGHT

PD, DALI

Material: aluminum

Up: 2000lm | 4000K | CRI80

Down: 3000lm | 4000K | CRI80

200–240V ~50/60Hz | 1500mA

Total wattage: 57W

Product dimensions: L: 120 cm, W: 26 cm, H: 3 cm

### Options

■ black



### Prod. no.

1005395

□ white



1005396



IP 20

IK 02

80°

110°

19

L80B10

250





# ONE LINEAR

Our modern all-rounder will impress you across the board. Another new feature is the brass-colored look, which makes the pendant light, which is available in two lengths and for 3-phase track systems, even more attractive. In addition, the two ONE LINEAR size versions are characterized by their DALI-dimmable light, which reproduces color in a particularly natural way and allows for adjustment of the light color via CCT switch (2700/3000K).

 BW22 | 118

**NEW**  

## ONE LINEAR 100

PD, PHASE, UP/DOWN

Material: aluminum/steel




Up: 550/580lm | 2700/3000K | CRI90

Down: 700/670lm | 2700/3000K | CRI90


220–240V ~50/60Hz | 600mA

Total wattage: 24W

Product dimensions: L: 104 cm, W: 1.6 cm, H: 4.2 cm

Options	Prod. no.
 black	1006185
 white	1006186
 brass	1006187



 BW22 | 118

**NEW**  

## ONE LINEAR 140

PD, PHASE, UP/DOWN

Material: aluminum/steel

Up: 830/860lm | 2700/3000K | CRI90



Down: 980/1015lm | 2700/3000K | CRI90

220–240V ~50/60Hz | 900mA

Total wattage: 35W

Product dimensions: L: 140 cm, W: 1.6 cm, H: 4.2 cm



Options	Prod. no.
 black	1006188
 white	1006189
 brass	1006190



**zagostore**  
Partagez votre intérieur  
avec le #zagolovers  
[ago-store.com](http://ago-store.com)



# ONE DOUBLE

Twice as stylish and now also in brass: the ONE DOUBLE adds a special extra touch to any setting with its modern, circular design. This pendant light is characterized by its upward and downward radiating light, which is also DALI-dimmable.



 BW22 | 123

**NEW VARIANT**



## ONE DOUBLE

PD, PHASE, UP/DOWN

Material: aluminum/steel

Up: 615/635lm | 2700/3000K | CRI90

Down: 615/635lm | 2700/3000K | CRI90


220-240V ~50/60Hz | 900mA

Total wattage: 35W

Product dimensions: diameter: 80 cm, W: 4.5 cm, L: 150 cm

### Options

Options	Prod. no.
■ black	1004765
□ white	1004766
■ brass	1005178



130° 130° 180







# ONE 60

With its classic look, the ONE 60 luminaire enhances any room. The DALI-dimmable light creates an atmospheric setting. What's more, it also shines with the same high-quality lighting properties as its family members and is additionally available in a brass-colored version.



 **BW22 | 121**

**NEW VARIANT**



## ONE 60

PD, PHASE, UP/DOWN

Material: aluminum/steel

Up: 410/415lm | 2700/3000K | CRI90


Down: 410/415lm | 2700/3000K | CRI90

220-240V ~50/60Hz | 600mA

Total wattage: 24W

Product dimensions: diameter: 60 cm, W: 4.5 cm, L: 150 cm

Options	Prod. no.
■ black	1004759
□ white	1004760
■ brass	1005177



130° 130° 180

# PARA CONE GL

When conically shaped glass creates an atmospheric lighting setting, it can only be the new PARA CONE GL. This decorative light also offers a high degree of flexibility – the GU10 socket makes it easy to replace LED bulbs. The light is available as a pendant light, 3-phase and single-phase version.



 BW22 | 472

 BW22 | 444

 BW22 | 166

**NEW** **SOCKET INSIDE**

## PARA CONE GL

PD, GU10

Material: aluminum/glass

220–240V ~50/60Hz

Product dimensions:

diameter: 13.5 cm, H: 15 cm



### Options

■ black

□ white

### Prod. no.

■ 1006159

■ 1006160



You can find matching accessories for the Para Cone GL on pages 166, 444 and 472 of the **BIG WHITE® 22** catalogue.









 BW22 | 444

**NEW** **SECKET**  
**INSIDE**

### PARA CONE GL


3-PHASE, GU10


Material: aluminum/glass

220-240V ~50/60Hz

Product dimensions: diameter: 13.5 cm, H: 25 cm

Options	Prod. no.
<input checked="" type="checkbox"/> black	<input checked="" type="checkbox"/> 1006157
<input type="checkbox"/> white	<input checked="" type="checkbox"/> 1006158



 .....  
PARA CONE is also available with a 15 cm diameter.



 BW22 | 472

**NEW** **SECKET**  
**INSIDE**

### PARA CONE GL


SINGLE-PHASE, GU10

Material: aluminum/glass

220-240V ~50/60Hz

Product dimensions: diameter: 13.5 cm, H: 22 cm

Options	Prod. no.
<input checked="" type="checkbox"/> black	<input checked="" type="checkbox"/> 1006155
<input type="checkbox"/> white	<input checked="" type="checkbox"/> 1006156





hv BW22 | 440



## SIGHT TRACK

3-PHASE, DALI

Material: aluminum/acrylic

3000/3000lm | 3000/4000K | CRI90


220-240V ~50/60Hz | 700mA

Total wattage: 39W

Dimmable: Dali

Product dimensions:

L: 114 cm, W: 4.5 cm, H: 12 cm



### Options

■ black  
□ white

### Prod. no.

■ 1005397  
■ 1005399

114





 BW22 | 450

**NEW**  

## SIGHT TRACK

3-PHASE

Material: aluminum/acrylic







3000/3000lm | 3000/4000K | CRI 90


220–240V ~50/60Hz | 700mA

Total wattage: 37W

Product dimensions:

L: 114 cm, W: 4.5 cm, H: 12 cm

Options	Prod. no.
 black	 1005400
 white	 1005401
 grey	 1005402



# SIGHT TRACK

SIGHT TRACK is made for 3-phase track systems. With its DALI dimmability and high color rendering index, this light – made of aluminum and acrylic – ensures a professional appearance wherever it is used and can also be flexibly positioned. A new feature is the CCT SWITCH, which can be used to select the light color between 3000 and 4000 Kelvin.

# PANEL TRACK

Square, round and available for the single-phase track: in addition to their high color rendering index, flat PANEL TRACK lights now also stand out due to their ability to rotate and swivel. The aluminum frame is fitted with an acrylic glass cover that ensures homogenous and glare-free illumination.



 BW22 | 471

**NEW** 

## PANEL TRACK

SINGLE-PHASE, SQUARE

Material: polycarbonate (PC)/steel

1800lm | 3000K | CRI90


220–240V ~50/60Hz | 450mA

Total wattage: 18W

Product dimensions: L: 30 cm, W: 15 cm, H: 9.3 cm

Options	Prod. no.
<input checked="" type="checkbox"/> black	 1004933
<input type="checkbox"/> white	 1004934



 BW22 | 471

**NEW** 

## PANEL TRACK

SINGLE-PHASE, ROUND

Material: polycarbonate (PC)/steel

1800lm | 3000K | CRI90

220–240V ~50/60Hz | 450mA

Total wattage: 18W

Product dimensions:  
diameter 20 cm, H: 5 cm


Options	Prod. no.
<input checked="" type="checkbox"/> black	 1004935
<input type="checkbox"/> white	 1004936





# BATTEN

For homogeneous illumination, the BATTEN LED light bar with its wide half beam angle of 150° is ideal. The option of switching between neutral white or warm white light color (3000/4000K) with just one click is new. This makes BATTEN more flexible than ever and, as usual, quick and easy to connect thanks to the supply cable and mains plug.

 BW22 | 334

**NEW** 

## BATTEN 120

CW

Material: polycarbonate (PC)


1900/1960lm | 3000/4000K | CRI90

220–240V ~50/60Hz | 220mA

Total wattage: 18W

Product dimensions:

L: 118.6 cm, W: 2.6 cm, H: 3.6 cm



### Options

white

### Prod. no.

1006124






**NEW** 

## BATTEN 60

CW

Material: polycarbonate (PC)


940/980lm | 3000/4000K | CRI90

220–240V ~50/60Hz | 110mA

Total wattage: 9W

Product dimensions:

L: 58.6 cm, W: 2.6 cm, H: 3.6 cm




### Options

white



### Prod. no.

1006123

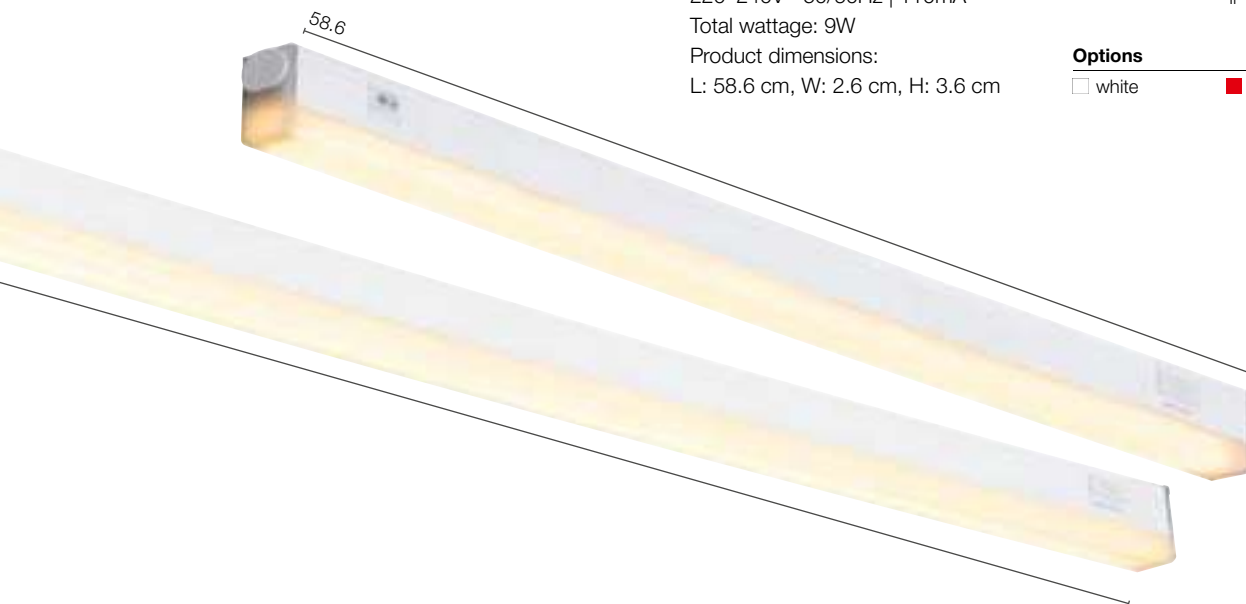

# MILANDOS

With four, six and eight integrated LEDs, the MILANDOS ceiling lights offer new lighting design possibilities. Compact installation dimensions are another feature of the elongated lights, which are available with two light colors (2700/3000K).



 BW22 | 349

**NEW** 

## MILANDOS 4

DL

Material: aluminum/polycarbonate (PC)



510–650lm | 2700–3000K | CRI90

700mA

Power consumption: 8W

Product dimensions: L: 13.6 cm, W: 5.6 cm

### Options

- black   
 white 

**NEW** 

## MILANDOS 6

DL

Material: aluminum/polycarbonate (PC)



770–980lm | 2700–3000K | CRI90

700mA

Power consumption: 12W

Product dimensions: L: 19.6 cm, W: 5.6 cm

### Options

- black   
 white 

**NEW** 

## MILANDOS 8

DL

Material: aluminum/polycarbonate (PC)



1030–1300lm | 2700–3000K | CRI90

700mA

Power consumption: 16W

Product dimensions: L: 25.6 cm, W: 5.6 cm

### Options

- black   
 white 



You can find matching accessories for the MILANDOS on **page 349** of the **BIG WHITE® 22** catalogue.



## HORN

With its combination of high-quality light housing and replaceable LED technology, HORN provides efficient lighting that is now also blower door tested. You and your customers can therefore be confident that the downlight will help to create a pleasant room climate and minimize the loss of energy.

 BW22 | 373

**NEW VARIANT**

**SOCKET  
INSIDE**

### HORN

DL, GU10

Material: aluminum

220–240V ~50/60Hz

Product dimensions: diameter: 7.6 cm

#### Options

Options	Prod. no.
■ black	1005435
□ white	1005436



IP 20 /  
IP 44



IK02




The downlight complies with the requirements of RT2012; HORN is blower door tested.



# KARPO GOOSE

With its flexible arm, the KARPO GOOSE wall-mounted light can be aligned as desired. This opens up countless possibilities for accent lighting in domestic settings such as living rooms and bedrooms, as well as in hotel rooms, restaurants and cafés. What's more, the light also offers a high color rendering index, dimmability via light switch and, of course, the elegant cylindrical SLV design.



 BW22 | 224

**NEW** 

## KARPO GOOSE

WL

Material: aluminum/steel


380–420lm | 3000K | CRI90

220–240V ~50/60Hz | 12V

Total wattage: 5.8W

Product dimensions:

diameter: 9 cm, H: 11.5 cm



Options		Prod. no.	
■ black 380lm	■	1006162	
□ white 420lm	■	1006161	



The light can be dimmed via a switch on the lamp head.








# OUTDOOR



# ESKINA FRAME

An all-round successful design elegantly packaged in a rectangular aluminum frame: our pioneering ESKINA FRAME free-standing lights now offer even more possibilities: while the 95° swiveling lamp heads provide flexibly adjustable light emission, the new lengths of 125 and 175 cm are simply outstanding.

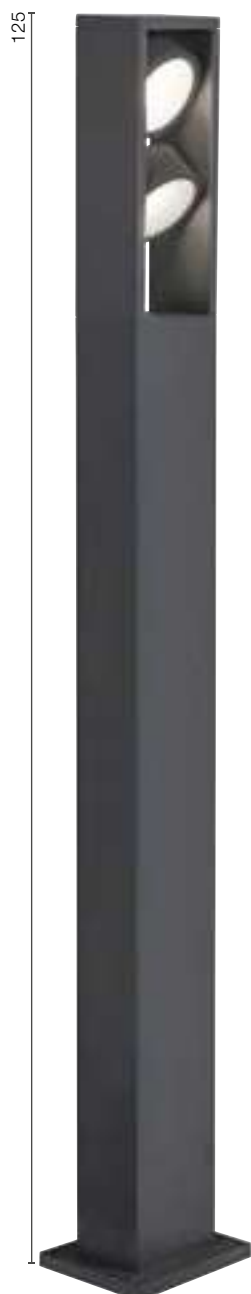

 BW22 | 514

**NEW**  

## ESKINA FRAME 125

POLE, DOUBLE

Material: aluminum

1100/1200lm | 3000/4000K | CRI80

220–240V ~50/60Hz | 700mA

Total wattage: 27W

Product dimensions:

L: 16.9 cm, W: 12.7 cm, H: 125 cm

**Options** **Prod. no.**

 anthracite  1005439






You can find matching accessories for the ESKINA FRAME on **pages 514 - 515** of the **BIG WHITE® 22** catalogue.

175



 BW22 | 515

**NEW**  

### ESKINA FRAME 175

POLE, DOUBLE

Material: aluminum

1100/1200lm | 3000/4000K | CRI>80


220-240V ~50/60Hz | 700mA

Total wattage: 27W


Product dimensions:

L: 16.9 cm, W: 12.7 cm, H: 175 cm

#### Options

 anthracite

#### Prod. no.

 1005440



# GRAFIT

When smoked glass optics harmonize with a robust aluminum base, the result is an all-round winner. The lampshades of the GRAFIT free-standing lights are made of satin-finish plastic and create a unique effect that makes the GRAFIT look like it is switched on when it is actually off. A square version with a new height is also available.



IP 44

 BW22 | 626

**NEW** **SECKET INSIDE**

## GRAFIT SENSOR

WL, ROUND, E27

Material: aluminum/acrylic

220–240V ~50/60Hz

Product dimensions:

diameter: 8.8 cm, H: 17 cm

### Options

Options	Prod. no.
■ anthracite SENSOR	■ 1006179
■ anthracite	■ 1006178



The GRAFIT is also available without SENSOR.

 BW22 | 518

**NEW** **SECKET INSIDE**

## GRAFIT

POLE, ROUND, E27

Material: aluminum/acrylic


220–240V ~50/60Hz

Product dimensions:

diameter: 14 cm

### Options

Options	Prod. no.
■ anthracite 30	■ 1006180
■ anthracite 60	■ 1006181
■ anthracite 90	■ 1006182

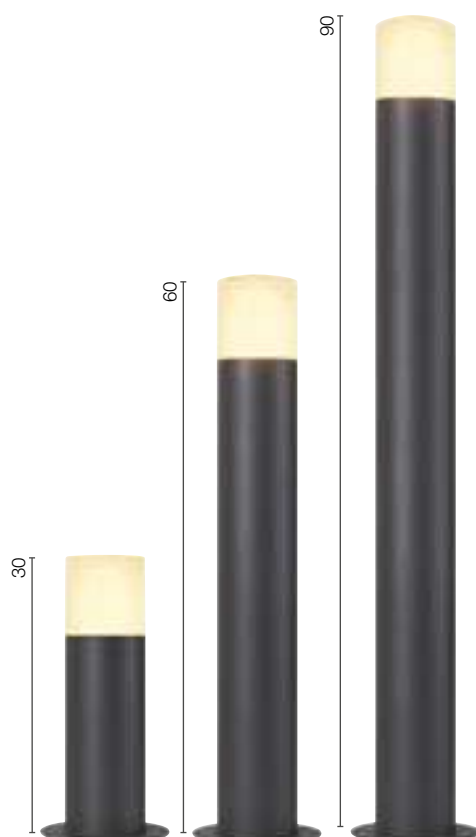

Open cable end





You can find matching accessories for the GRAFIT on **pages 518 - 521 and 626 - 627** of the **BIG WHITE® 22** catalogue.



BW22 | 627

**NEW** **SOCKET INSIDE**

### GRAFIT SENSOR

WL, SQUARE, E27

Material: aluminum/acrylic

220-240V ~50/60Hz

Product dimensions:

L: 8.5 cm, W: 8.5 cm, H: 17 cm



#### Options

■ anthracite

#### Prod. no.

■ 1006183



BW22 | 521

**NEW** **SOCKET INSIDE**

### GRAFIT 90

POLE, E27

Material: aluminum/acrylic

220-240V ~50/60Hz

Product dimensions:

L: 12 cm, W: 12 cm, H: 90 cm

#### Options

■ anthracite

#### Prod. no.

■ 1006184

90





# QUADRULO

The QUADRULO outdoor lights will impress you with their integrated LED strips that emit an indirect and warm white light. In addition, they are protected from wind and weather thanks to IP55 protection. Whether it is positioned on the ceiling, wall or its mobile stand, QUADRULO has an elegant and straightforward appearance.

BW22 | 522

**NEW**

## QUADRULO

FL  
Material: aluminum/acrylic

340lm | 3000K | CRI80  
100-277V ~50/60Hz | 480mA  
Total wattage: 7W  
Product dimensions:  
L: 14 cm, W: 14 cm, H: 53 cm




Options	Prod. no.
anthracite	1005442



IP connection box





 BW22 | 629

**NEW** 



## QUADRULO

WL

Material: aluminum/acrylic

270 lm | 3000 K | CRI80

100-277V ~50/60Hz | 350mA

Total wattage: 8W

Product dimensions:


W: 12.5 cm, H: 25 cm, D: 13 cm

Options	Prod. no.
 anthracite	 1005201



 BW22 | 675

**NEW** 



## QUADRULO

CL

Material: aluminum/acrylic

230 lm | 3000 K | CRI80

100-277V ~50/60Hz | 480mA

Total wattage: 7.5W

Product dimensions:

L: 14 cm, W: 14 cm, H: 13 cm

Options	Prod. no.
 anthracite	 1005202





# SITRA

SITRA is the name of SLV's modern wall lights, which are available in various sizes and colors to harmonize with any architectural style. The Up/Down versions in particular offer an exciting way of showcasing façades. Thanks to their IP44 protection class, the lights are optimally protected. A special highlight is the rust-colored version, which exudes an ephemeral charm.






 BW22 | 624

**NEW** **LED** **INSIDE** 

**SITRA S**  
WL, SINGLE, SQUARE  
Material: aluminum/glass

580/620 lm | 3000/4000 K | CRI80  
220-240V ~50/60Hz | 500mA  
Total wattage: 6.2W  
Product dimensions:  
W: 11.8 cm, H: 11 cm, D: 8.4 cm

Options		Prod. no.
 anthracite		1005148
 white		1005149
 rust		1005150



**SITRA M**  
WL, UP/DOWN, SQUARE  
Material: aluminum/glass

Up/Down: 800/850lm | 3000/4000K | CRI80  
220-240V ~50/60Hz | 350mA  
Total wattage: 14W  
Product dimensions:  
W: 20 cm, H: 11 cm, D: 8.4 cm


Options		Prod. no.
 anthracite		1005151
 white		1005153
 rust		1005154



**SITRA L**  
WL, UP/DOWN, SQUARE  
Material: aluminum/glass

Up/Down: 1350/1400lm | 3000/4000K | CRI80  
220-240V ~50/60Hz | 600mA  
Total wattage: 24W  
Product dimensions:  
W: 30 cm, H: 11 cm, D: 8.4 cm


Options		Prod. no.
 anthracite		1005155
 white		1005156
 rust		1005157





# BOOKAT

Unusual, innovative and an absolute eye-catcher: the BOOKAT wall lamp will impress you with its design, but also with its high-quality light. During installation, the color temperature can be selected between warm white and neutral white via CCT switch. And thanks to its IP65 protection class, BOOKAT can also withstand any wind and weather.

 BW22 | 632

**NEW**  

## BOOKAT

WL

Material: aluminum

920/990lm | 3000/4000K | CRI80

100-277 V ~50/60 Hz | 700 mA

Total wattage: 15W

Product dimensions: W: 7.5 cm, H: 30 cm, D: 25.5 cm

### Options

 anthracite



### Prod. no.

1005443










# FLOODI

If you want to illuminate façades, outdoor facilities or particular objects in a targeted way, FLOODI is a must. This attractive floodlight is robust and made of glass and aluminum. It is even protected against splashes of water thanks to its IP65 protection rating, and with a luminous flux of up to 5150 lumens, it is made for professional challenges.

 BW22 | 589

**NEW** 

## FLOODI S

SP

Material: aluminum/glass


1040lm | 3000K | CRI80

220–240V ~50/60Hz

Total wattage: 9.3W

Product dimensions: B: 9.5 cm, H: 16 cm, D: 2.8 cm

Options	Prod. no.
 anthracite	 1006191



## FLOODI M

SP

Material: aluminum/glass


2980lm | 3000K | CRI80

220–240V ~50/60Hz

Total wattage: 30W

Product dimensions: B: 16 cm, H: 22.3 cm, D: 2.8 cm

Options	Prod. no.
 anthracite	 1006192



## FLOODI L

SP

Material: aluminum/glass


5150lm | 3000K | CRI80

220–240V ~50/60Hz

Total wattage: 48W


Product dimensions: B: 20 cm, H: 24.5 cm, D: 2.8 cm

Options	Prod. no.
 anthracite	 1006193



# SMALL PLOT

For an atmospheric effect and orientation lighting, SMALL PLOT is now also available with a diameter of around 7 cm. Together with the matching covers, the module (made of aluminum, stainless steel and plastic) helps to create exciting lighting effects. With its IP67 protection class, the light is also optimally protected.

 BW22 | 727

**NEW** 

## SMALL PLOT MODULES

Material: aluminum / 316 stainless steel /  
polymethylmethacrylate (PMMA)

240lm | 3000K | CRI80


24V DC

Power consumption: 3W

Product dimensions: diameter: 7.1 cm, H: 1.4 cm

### Options Prod. no.

<input type="checkbox"/> aluminum	<input type="checkbox"/>	1006172
<input type="checkbox"/> stainless steel	<input type="checkbox"/>	1006171



**+** **SMALL PLOT**  
COVER 4-pack

**+** **SMALL PLOT**  
COVER, 2-pack



Open cable end

You can find the SMALL PLOT covers in 2-packs and 4-packs on **page 727** of the **BIG WHITE® 22** catalogue.





# DASAR® FLAT

The DASAR® recessed floor light FLAT is a tough lighting solution. It features a stable and accessible design and can withstand the heaviest loads in size 120 thanks to its robust construction, high-quality stainless steel trim and glass cover in a partial satin finish. Its IP67 protection class and IK08 shock resistance rating mean that it is also optimally protected.

 BW22 | 717





**NEW** 

## DASAR® FLAT 120 EL


Material: 304 stainless steel

520lm | 3000/4000K | CRI80  
220–240V ~50/60Hz | 350mA  
Total wattage: 7W  
Product dimensions:  
diameter: 12 cm



Options	Prod. no.
 stainless steel 3000K 	1006106
 stainless steel 4000K 	1006107



 .....  
Open cable end

# ROCCI

Round, angular, larger: with its stainless steel trim, clear glass cover and high-quality LED module, the ROCCI recessed floor light provides high-quality outdoor lighting. It is also optimally protected with an IP67 protection class and IK08 shock resistance rating. Thanks to the included recessed fixing kit, the light is additionally quick and easy to install.


 BW22 | 730

**NEW** 

## ROCCI 200 EL, ROUND/SQUARE


Material: steel

1530lm | 3000K | CRI80  
100–277V ~50/60Hz | 350mA  
Total wattage: 16W  
Product dimensions:  
diameter: 20 cm / L: 20, W: 20 cm



Options	Prod. no.
  stainless steel 	1006104
  stainless steel 	1006105



 .....  
Recessed fixing kit included



# FENDA

Mix and match for lighting variety: FENDA is available with a variety of different colored lampshades and elements, in different dimensions and as a ceiling, wall, pendant, table or arched light – for an individual lighting experience that harmonizes with the style of your project.

## NEW VARIANT

### FENDA

ROUND

Material: textile/steel

#### Options

- black/copper
- white
- beige
- grey



BW22 | 277



BW22 | 155



BW22 | 107



Ø 15



Ø 30



Ø 45,5




You can find all FENDA sizes and variants on **pages 107, 155 and 277** of the **BIG WHITE® 22** catalogue.



MIX & match



 BW22 | 617
**NEW****ENOLA**

REFLECTOR 56°

Material: polycarbonate (PC)

Sizes:

S | H: 1.85 cm, diameter: 4.5 cm

M | H: 4 cm, diameter: 7.5 cm

L | H: 6.96 cm, diameter: 11 cm

**Options**
 chrome
**ENOLA M**

LENS 19°

Material: steel/polycarbonate (PC)

H: 3.8 cm, diameter: 7.5 cm

**Options**
 black/chrome
**Prod. no.**

1005205

**ENOLA M**

LINE ASYMMETRICAL

Material: steel/polycarbonate (PC)

H: 3 cm, diameter: 7.5 cm

**Options**
 black/chrome
**Prod. no.**

1005206

**ENOLA**


When it comes to purism, the lights in the ENOLA series make no compromises. They are extremely versatile in their range of applications. Thanks to the lenses and reflectors that can be combined for several light emissions, even more is now possible: use the 56° half beam angle for more uniform illumination, the 19° angle for a narrow light cone or the lens with an asymmetrical beam pattern.

**NEW**

NUMINOS® GIMBLE XS -XL DL	10 - 11
NUMINOS® ZOOM M 3-PHASE	14 - 15
WORKLIGHT FL	18 - 19
WORKLIGHT TL	18 - 19
WORKLIGHT PD, DALI	20 - 21
ONE LINEAR 100 PD, PHASE, UP/DOWN	22 - 23
ONE LINEAR 140 PD, PHASE, UP/DOWN	22 - 23
PARA CONE GL PD, GU10	26 - 27
PARA CONE GL 3-PHASE, GU10	28 - 29
PARA CONE GL SINGLE-PHASE, GU10	28 - 29
SIGHT TRACK 3-PHASE, DALI	30 - 30
SIGHT TRACK 3-PHASE	31 - 31
PANEL TRACK SINGLE-PHASE, SQUARE	32 - 33
PANEL TRACK SINGLE-PHASE, ROUND	32 - 33
BATTEN 120 CW	34 - 34
BATTEN 60 CW	35 - 35
MILANDOS 4 + 6 + 8 DL	36 - 36
ESKINA FRAME 125 POLE, DOUBLE	42 - 42
ESKINA FRAME 175 POLE, DOUBLE	43 - 43
GRAFIT SENSOR WL, ROUND, E27	44 - 44
GRAFIT WL, ROUND, E27	44 - 44
GRAFIT POLE, ROUND, E27	44 - 44
GRAFIT SENSOR WL, SQUARE, E27	45 - 45
GRAFIT 90 POLE, E27	45 - 45
QUADRULO FL	46 - 46
QUADRULO WL	47 - 47
QUADRULO CL	47 - 47
SITRA S WL, SINGLE, SQUARE	48 - 49
SITRA M + L WL, UP/DOWN, SQUARE	48 - 49
BOOKAT WL	50 - 51
FLOODI S-L SP	52 - 53
SMALL PLOT MODULE	54 - 54
SMALL PLOT COVER 2-PACK + 4-PACK	54 - 54
DASAR® FLAT 120 EL	55 - 55
ROCCI 200 EL, ROUND/SQUARE	55 - 55
ENOLA REFLECTOR 56°	57 - 57
ENOLA LENS 19°	57 - 57
ENOLA M ASYMMETRICAL LENS	57 - 57

**NEW VARIANT**

NUMINOS® XS DL	08 - 08
NUMINOS® MOVE XS + S DL	09 - 09
NUMINOS® XL PD	12 - 12
NUMINOS® XL 3-PHASE	12 - 12
NUMINOS® XL CL	13 - 13
NUMINOS® XL CL	13 - 13
ONE DOUBLE PD, PHASE, UP/DOWN	24 - 24
ONE 60 PD, PHASE, UP/DOWN	25 - 25
HORN DL, GU10	38 - 38
FENDA ROUND	56 - 56

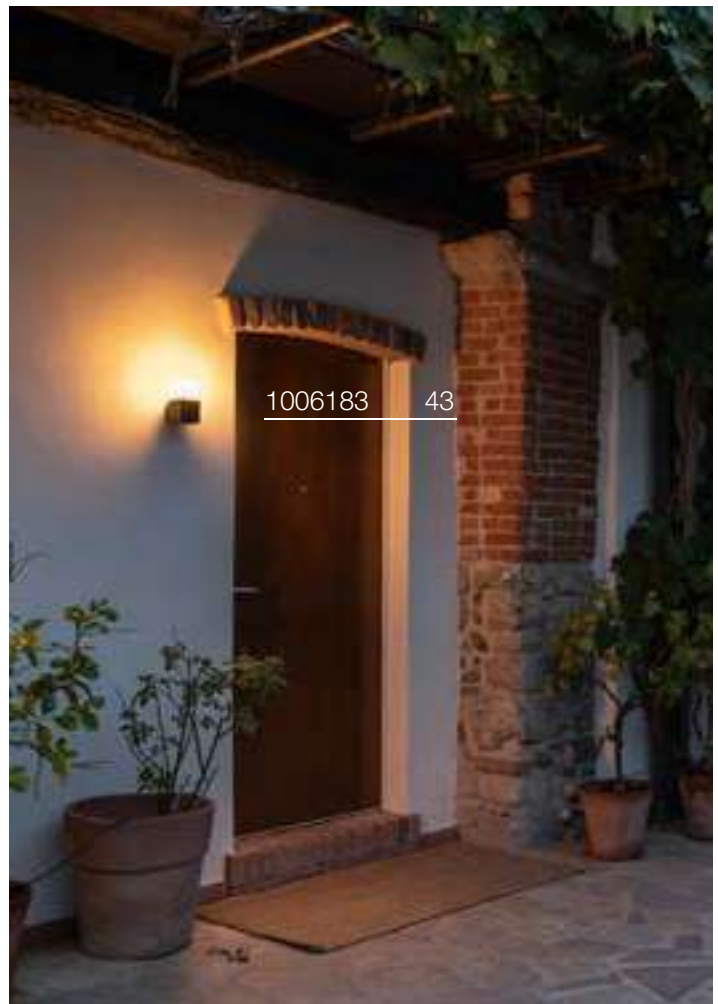

1006183 43



1004247 + 1006168 12

# SYMBOL KEY

## PRODUCT CHARACTERISTICS

Information on whether **light sources and control units** can be replaced by end users or qualified individuals **without causing permanent damage to the lights**



- Lightbulb can be replaced by a qualified person
- LED can be replaced by a qualified person
- Control unit can be replaced by a qualified person



- Lightbulb can be replaced by the end user
- LED can be replaced by the end user
- Control unit can be replaced by the end user




- Lightbulb cannot be replaced
- Control unit cannot be replaced



### Dimmable with...

- C = leading-edge **phase dimmer**
- Dali = Dali busbar system
- Switch = switch/button or touch control on the light



### Rotating and pivoting capacity in degrees:

- Rotation range
- Pivot range




### Beam angle

Describes the beam angle in degrees. The smaller the angle, the more concentrated the light will be.



### Pendant cable length in cm



**Power cable length** in cm  
**Feed-in length** in cm (with open cable ends)



### Lumen maintenance

Describes the amount by which the luminous flux of an LED decreases during a specified period.



### UGR = Unified Glare Rating

The lower the UGR value, the lower the psychological glare.

## SAFETY DETAILS



### Protection categories

- Protection category I/protective conductor
- Protection class II/protection through double or strengthened insulation
- Protection category III/protection through low voltage



The **IK degree of shock resistance** is a measure of the resistance of the housing of electrical equipment to mechanical stress, especially impact stress..

## APPLICATION AREA · ASSEMBLY



### IP protection class

Indicates the suitability of electrical equipment for different environmental conditions.



**Through-wiring** possible

## SPECIFIC DETAILS – RECESSED LIGHTS



**Weight-bearing capacity** of the product up to specified value in tonnes. Measurements based on concrete installation.

## SPECIAL SYMBOLS



Indicates products that have been added to the catalogue **for the first time**



Indicates **new versions** of existing products

- New color variant
- New product variant



Indicates products  
· with **integrated LEDs**  
· with **lamp socket**



### Connected lighting

Indicates smart products that use the following protocols: DALI



Indicates **lights with motion sensors** (infrared)



Using the integrated **CCT** switch, the light colour can be switched between 3000K and 4000K during installation.



Indicates products that **can be combined**

## BROCHURE SYMBOLS



Product details



Recommended accessories



Tip



Indicates the category NUMINOS®



Indicates the category INDOOR



Indicates the category OUTDOOR



Indicates the category ACCESSORIES



Product categories



Size indications for NUMINOS® XS – XL





EXPERIENCE LIGHT

SLV GmbH  
Daimlerstrasse 21-23  
52531 Uebach-Palenberg  
Germany

T +49 2451 4833 - 355  
F +49 2451 4833 - 179

export@slv.de  
slv.com



Innovative use of combined heat and power technology when printing this product reduced CO<sub>2</sub> emissions by up to 52% in comparison to conventional methods in Germany.